

Product Specifications

Total Product Weight: Typically 1600gsm
Total Nominal Thickness: 10-12mm
Finish: Available in fine velour or "Classic" rib finish

Roll Length/Width: Standard 25m x 1.22m

Peel 'n' Stick Tiles:

Tile Size: 600mm x 600mm
Tile Pack: 6 tiles per pack (2.16m² coverage)
 (Selected colours available only)

'Hook and Loop': Hook and loop compatible.
 A hook of 1.5mm or less is recommended

Fire Ratings:

AS1530 Part 3

Spread of Flame (Index 0-10) 0
 Smoke Developed (Index 0-10) 5
 - Tested April 2002, CSIRO

AS/NZS 3837

Group 3
 Ave Specific Extinction Area: 157.7m²/kg
 - Tested August 2004, CSIRO

BS476


Part 5: Class P
 Part 6:
 Index $i_1 = 5.2$, Index $i_2 = 3.2$, Index $i_3 = 0.8$
 Fire Propagation Index = 9.2
 Part 7: Class 1Y
 - Tested October 2000, CSIRO

Fastness to Light: Composition is suitable for indoor use only and has been tested to the following standard
 ISO 105-B02-1994 (Grey Scale 1-5):
 Light Fastness Rating 3

Installation: Please refer to our Composition Installation Guide for installation instructions and hints.

Care & Maintenance: Please refer to our Autex Wall Coverings Care & Maintenance Guide for cleaning instructions.

Acoustics: Composition[®] has been tested to a Noise Reduction Coefficient (NRC) of 0.4 and will typically reduce reverberated noise by approximately 40%. This graph illustrates the acoustic performance of Composition through the frequency range of 100-5000Hz. For copies of the full acoustic test report, please contact Autex. (Tested in accordance to ISO 354)

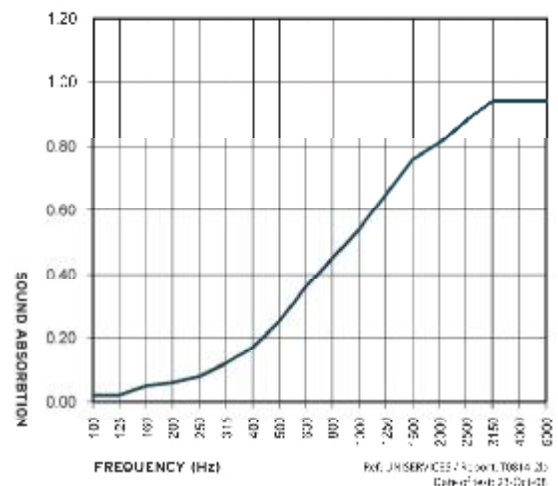

Composition has been engineered specifically to reduce and control reverberated (echo) noise in building interiors. Composition will also increase the sound transmission performance of walls. When adhered to one side of a wall, Composition provided a 3 STC point increase in the performance of the wall. For specific acoustic requirements, we recommend you consult an acoustic engineer.

Service: For further information about Composition or any other Autex Wall Covering products, please contact your local distributor, an Autex Representative or visit our website at www.autex.co.nz

How to Specify: "Autex Composition acoustic wall covering with NRC.0.4 fixed to the wall substrate in accordance with the manufacturers recommendations. Please contact Autex or your local distributor".

Composition[®] is manufactured in New Zealand and is a registered trademark of Autex Industries Ltd. Autex reserves the right to alter specifications without prior notification. Autex Industries Ltd is an ISO9001 certified company.



Autex Industries Ltd
 702 716 Rosebank Rd
 Private Bag 10088,
 Auckland 1146, Auckland
 New Zealand
 Phone: +64 9 828 6179
 Fax: +64 9 828 5610
 Email: info@autex.co.nz
www.autex.co.nz

Autex Pty Ltd
 156 Gairloch Rd,
 PO Box 5093,
 West Melbourne, Melbourne
 VIC 3021 Australia
 Phone: +61 3 9487 8700
 Fax: +61 3 9487 1020
 Email: info@autex.co.nz
www.autex.co.nz

All information offered on this card is given in good faith but without warranty. Autex reserves the right to alter specifications without prior notification. Autex is an ISO 9001 certified company. Slight variations in colour from the samples may be experienced due to the nature of the manufacturing process. Issue: COMP241108