

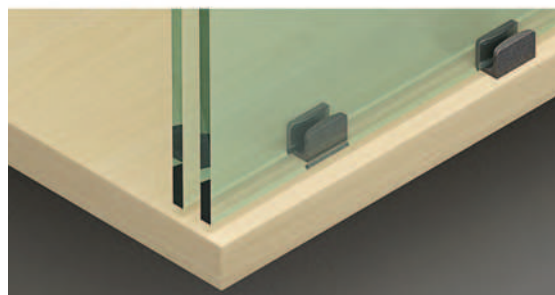
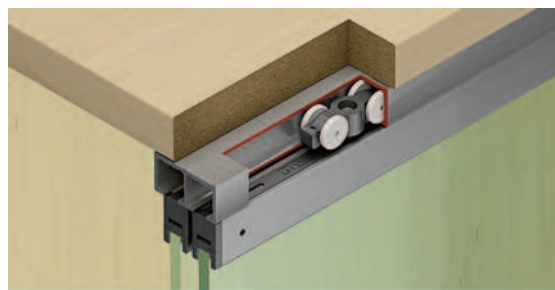


## EKU CLIPO 16 GPK/GPPK




- > Version:
- Model GPK with top glass retaining profile and visible bottom guide with zero clearance.
  - Model GPPK with top and bottom glass retaining profile and concealed bottom guide with zero clearance, with soft closing mechanism (optional)
- > Door height (mm): ≤1400
  - > Door width (mm): ≤1000
  - > Glass thickness (mm): 6
  - > Door stopper: Top door stopper
  - > Material: Plastic
  - > Running gear: Top running, 2 rollers
  - > Running gear guided by: Friction bearing mounted roller: Plastic,
  - > Adjustment facility (mm): +2/-1 on running gear
  - > Installation: Running gear without tools (quick fixing system), guide for screw fixing without glass preparation

### Running gear installation

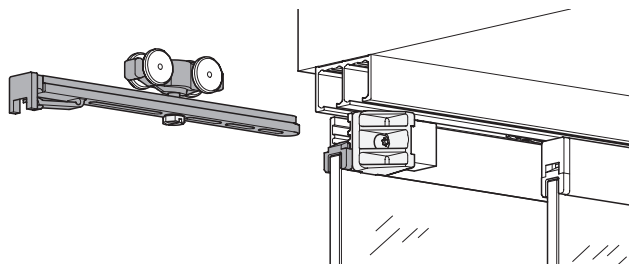


Minimum door width for one soft close mechanisms - 400 mm




Minimum door width for two soft close mechanisms - 600 mm

### Installation dimensions

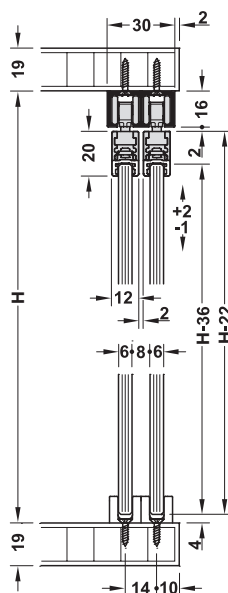


Clipo 16 GPK; with glass fixing profile at the top

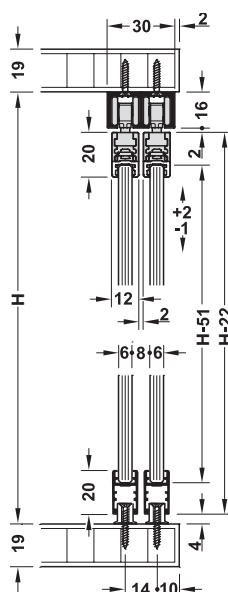

Clipo 16 GPPK; with glass fixing profile top and bottom

### Door overlap

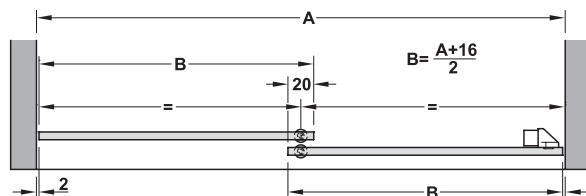

A = Internal cabinet width  
H = Internal cabinet height  
B = Door width